

Product Informations *Updated: 12/02/2022*

HF adhesive label, white PET version, size mm.Diam.25, with 3M 467-MP adhesive, OFF metal use.

Services available for custom printing and coding

Option: Black or CMYK colors printing, barcode / QR / Logos - User memory encoding - Special packaging - Custom label dimensions

Variants: Versions on request: WET IN-LAY (Transparent PET) or printable White PAPER or with special 3M ADHESIVES

Electrical Tag features:	Frequency	Reading distance	Chip Type	EPC-UID	User Memory
HF	13,56 MHz	Up to 1-6 Cm.	ICODE SLIX	7 Byte	896 bits-112 Byte
	ISO standard 15693 /18000-3M1 (NFC T5T)	Operating temp.C° -40/+85 °C	Storage temp.C° -50/+125 °C	EPC Access-pass ND	Data Retent. 50 years

Optional Chip: ICODE SLIX, ICODE SLIX_2

Label Physical features *Antenna of Tag*

Size Label mm

Diam.25

Surface Material

White PET

Adhesive



3M 467-MP (80 microns)

Mounting

OFF Metal


Size Antenna mm.

Diam.22



Standard Packaging *Cross-Section Label*


"L" Width	
D mm.	
"A" Height	
25 mm.	
"Step"	
mm.	
Liner	
mm.	



single-row roll

Pcs
 Roll:
 Outer
 Diam. mm
 Internal
 Diam. mm

76

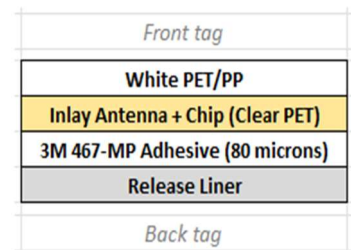

Packaging Notes: